

325

LIBERTY, TEXAS  
MAY 24, 1943

Mr. Bascom-Giles  
Commissioner General Land Office  
Austin, Texas

Dear Mr. Giles:

Please find inclosed the following unrecorded field notes of the following Surveys, to-wit:

1. The South 404.5 acres of T. & N. O. R.R. Co. Survey No. 14.
2. The East 1/2 of T. & N. O. R.R. Co. Survey No. 18.
3. T. & N. O. R.R. Co. Survey No. 28, all in Liberty County, Texas.

If I am not out of order, I would appreciate it if you would look these field notes over and advise me if you wish any changes made in them. Please return them to me at your earliest convenience and I will make changes as suggested by you before recording them, or record them as they are if they meet with your approval.

You will note, the North and South lines of T. & N. O. R.R. Survey No. 14 have an excess of 19 varas. We found an old  $1\frac{1}{2}$  inch iron pipe rusted off just above the ground at the Northeast corner of this Section, at 4 corners of an old fence and at the Northwest corner we found an  $1\frac{1}{2}$  inch iron pipe rusted off just above the ground at the Southeast and Southwest corner of an old fence and in doing some surveying in T. & N. O. R.R. Survey No. 16, last year, we measured West from the Southeast corner of T. & N. O. R.R. Section No. 16 (which is 50 varas, instead of 60 varas West of the West edge of a marsh. This is a flat marsh and was dry at the time we were there. It is possible that Mr. Green, in 1890, measured to the West edge of the water.), at 1900 varas we failed to find a corner because a road has been graded on this line, but at about 1907 varas we were in line with an old fence that runs North to the Northwest corner of said Section No. 16, identified by large natural mound called for by Green. We continued West with the same measurement and at 3824 varas we found no corner for the same reason, but we were in line with the old fence on the East line of T. & N. O. R.R. Survey No. 14, as surveyed by us May 13th, 1943. We made the West line of Section fourteen 1903 varas long because in 1925 we surveyed Section No. 17 T. & N. O. R.R. Co. and found an old 2 inch iron pipe at the Southeast corner, which has been covered up by said graded road, and it was 1903 varas from old  $1\frac{1}{2}$  inch iron pipe at the Northeast corner of Section No. 17 to the old 2 inch iron pipe at the Southeast corner of same, we let this distance of 1903 varas determine the length of the East and West lines of Section No. 14, 17 and 18 as the old South corners of Section No. 14 and 17 and the Southeast corner of No. 18 are probably under said graded road and the Southwest corner of No. 18 is probably under the

North levee of an irrigation canal. We set a 2 inch iron pipe for the Northwest corner of T. & N. O. R.R. Co. Survey No. 18 and the Southwest corner of T. & N. O. R.R. Co. Survey No. eleven, 1904 varas S. 89° 33' W. from the Cypress stake set for the Northeast corner of Section No. 18 under a fence running North and South and in the center of the West levee of an old lateral running North and South, and from this 2 inch iron pipe we measured N. 0° 40' W. 1901.2 varas to an old 1½ inch iron pipe on the West side of a block of concrete about 8 inches square with a 4 inch iron pipe set in the center of same and filled with concrete and a piece of sucker rod set in the center of said 4 inch pipe, at the Northwest corner of T. & N. O. R.R. Co. Survey No. 11. The 2 inch iron pipe set for the Northwest corner of No. 18 is 223 varas South of the center of a gully (this gully has been enlarged with a drag line). Mr. Green in 1890 said this corner was 226 varas South of the center of a gully. We set the Northeast corner of the patented portion of said Survey No. eighteen, 950 varas N. 89° 33' E. from said 2 inch iron pipe at the Northwest corner of No. 18. We set a 2 inch iron pipe in the center of the North levee of an irrigation canal for the Southwest corner of said Section No. eighteen, 1903 varas S. 0° 40' E. from the Northwest corner of Section No. 18. Green's corner was identified by us in 1925 at this corner, but it is probably under said canal levee now. We set the Southeast corner of the patented portion of No. eighteen 950 varas N. 89° 33' E. from said 2 inch iron pipe set in the center of said North levee of said canal at the Southwest corner of Section No. 18.

We ran the West line of Section No. 28 from 2 inch iron pipe set for the Northwest corner S. 0° 34' E. 1905 varas to a large Cypress stake set on the North side of a large Cypress fence corner post 2.4 varas from the West bank of a slough 10 varas wide, and East of an angle in a graded road. In 1929 in a Survey of the North 1/2 of T. & N. O. R.R. Survey No. 34 we checked West from a 3/4 inch square iron bar at a fence corner at the Northwest corner of T. & N. O. R.R. Survey Section No. 34 to this old Cypress fence corner post and found the distance to be 1900 varas. The square iron bar has been destroyed either in the building of a graded road that runs North from this point or in the constructing of an irrigation canal just South of this corner, the center of the North levee of which is 8.5 varas South. We set the Southeast corner of Section twenty-eight 1900 varas N. 89° 33' E. from said old fence corner post in slough and then ran the East line of Section No. 28 N. 0° 22' W. with said graded road 1905 varas to 2 inch iron pipe set for the Northeast corner of Section No. 28, which is in the North edge of grade (graded road) running East and West and in line with East edge of grade going South.

In surveying these Sections I have used information that I have obtained in the past 18 years, and 18 years ago this Country had not been in rice and many of Green's corners could be found.

The above Surveys were made for the respective owners in order that they may have same patented.

With kind regards, I am

Sincerely,


*R. G. Partlow*

R. G. Partlow  
County Surveyor, Liberty County, Texas  
and  
Licensed State Land Surveyor

RGP:rmp

counter 30069

m'

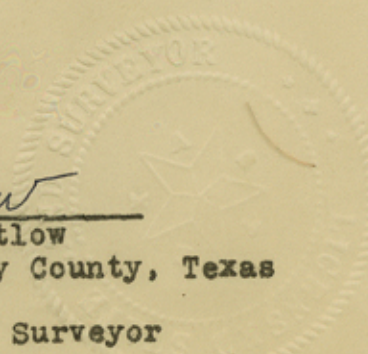

Sketch File No. 59

Liberty County  
R.G. Partlow's Report of Surveys  
of T. & N. O. Sections in S.E. Part  
of County

Filed June 2 1943  
Bascom Giles Com'r

W. Moon Rosenberg  
File Clerk

See Liberty Rolled Sk. E.  
for sketch.

with King ledge. I am

in order that they may have same benefited.  
The spoke Entleys were made for the respective corners

could be found.

This County had not been in line and many of Green's corners  
that I have obtained in the past 18 years, and 18 years ago  
in surveying these sections I have used information

that was in line with East edge of Edge (Edge being corner  
which is in the north edge of Edge (Edge being corner  
No. 38 N. O. SS, W. with this bedded corner of Section No. 38,  
ence corner east in along and then turn the bedded corner  
Section twenty-eight 1300 acres N. 38. E. 1/4. The  
of which is 8.2 acres South. We set a corner of the  
corner that South of this corner, the center of the  
North from this point to the center of the corner of the  
destroyed either in the putting of a corner of the  
the distance to be 1300 acres. The edge of the  
Section No. 24 to this old Cypress fence corner  
corner of the North East corner of T. & N. O. E. B. Co.  
we checked West 1/4 and 2/4 inch square on the  
in a ledge of the North East corner of T. & N. O. E. B. Co.  
acres wide, and that of an angle in a ledge  
ence corner East 3/4 acre from the West bank  
to a large Cypress stake set on the North edge  
iron pipe set for the North East corner 200.24, E. 1/4  
We then the West line of Section No. 38 from S. 1/4

and corner of the North East corner of Section No. 18.  
3 inch iron pipe set in the center of said North ledge of  
ed portion of No. eighteen 320 acres N. 38. E. 1/4. From said  
corner ledge now. We set the southeast corner of the present  
ly in 1882 at this corner, but it is properly under said  
west corner of Section No. 18. Green's corner was identified  
Section No. eighteen, 1202 acres S. O. 40. E. 1/4. From the North-  
ledge of an illustration sent for the southeast corner of said  
of No. 18. We set a 3 inch iron pipe in the center of the North  
N. 38. E. 1/4. From said 3 inch iron pipe we set a corner  
of the benefited portion of said ledge No. 18. From the  
South of the center of a ledge. We set the North  
edge line). Mr. Green in 1880 said this corner was  
the center of a ledge (this ledge has been in  
set for the North East corner of No. 18 in 1882  
of T. & N. O. E. B. Co. Ledge No. 11. We set a 3 inch iron pipe  
set in the center of said 4 inch pipe, and  
of same and lapped with concrete and a piece of  
about 8 inches across with a 4 inch iron pipe set  
old 1/4 inch iron pipe on the West side of a block of  
iron pipe we measured N. O. 40. E. 1/4. We set a  
of an old ledge running North and South, and from this S  
running North and South and in the center of the West ledge  
set for the North East corner of Section No. 18 under a fence  
No. eleven, 1202 acres S. 38. E. 1/4. From the Cypress stake  
No. 18 and the North East corner of T. & N. O. E. B. Co. Ledge  
pipe for the North East corner of T. & N. O. E. B. Co. Ledge  
North ledge of an illustration sent. We set a 3 inch iron

**RECEIVED**  
MAY 25 1949

**REFERRED TO MAP**