

Randall Co.  
First Boundary

Randall Co Bdry Line 5

Filed in Gene. Land  
Office May 20<sup>th</sup> 1901  
L. C. Wise

See Sketch E'line in Carson  
Co. Boundaries

Approved and Abst.  
Corrected 7/1/1901  
L. C. Wise

Contents

No 1 Field Notes  
" 2 ord of Court





1 State of Texas } Field notes of a survey of the boundary  
2 County of Carson } line between Armstrong and Randall Counties;  
3 Monday, March 4<sup>th</sup> 1901. Began at the zinc cones, south  
4 mound and 4 pits marking the common corner of Pather,  
5 Carson, Armstrong and Randall Counties.

6 Thence South on trial line to connect with the estab-  
7 lished SW corner of Armstrong and SE corner of Randall  
8 Counties - variation of Needle -  $10^{\circ} 45' E$ , 30 miles to  
9 a point on level plains from which a mound and semi-  
10 circular trench is  $S 88^{\circ} W$  1166 varas - said mound and  
11 trench being identified as marking the SW corner of Armstrong  
12 and SE corner of Randall Counties by bearings on wind-  
13 mill  $N 60^{\circ} E$  and former location of Jesse Doblas house  
14 (the house having been moved) -  $S 14\frac{1}{2}^{\circ} W$  - 341 varas.

15 From said point on plains an iron section corner pipe  
16 marked  $\begin{matrix} 208 - 189 \\ (4) \end{matrix} - \begin{matrix} 190 - 207 \\ (26) \end{matrix} \begin{matrix} 190 - 207 \\ (23) \end{matrix} \begin{matrix} 190 - 207 \\ (18) \end{matrix}$  is  $N 73\frac{1}{2}^{\circ} E$  155 varas.

17 From the above described mound and semicircular  
18 trench marking the corner of Armstrong and Randall Counties  
19 run a line North with magnetic variation necessary  
20 to give a course that will connect by a straight line  
21 the beginning point with the zinc cones marking the  
22 NW corner of Armstrong and NE corner of Randall Counties,  
23 said variation being  $9^{\circ} 35' E$ .

24 Thence North - at 1555 vs and 1800 vs cross roads. at  
25 1900.8 vs set iron pipe  $1\frac{1}{2} \times 36$  marked 1-29 - A Co - R Co.  
26 and build mound 2ft high and two pits - said point being  
27 5 varas south of road  $S 80^{\circ} E$ .

28 North - 1226 vs field fence - 1876 vs North fence of field - 1900.8  
29 vs set iron pipe  $1\frac{1}{2} \times 36$  marked 2-28 - A Co - R Co - and build  
30 mound 2ft high and 2 pits for 2<sup>nd</sup> mile.

31 North - 650 vs cross ravine East. at 1372 vs E & W road.  
32 1887 vs fence - 1900.8 vs set iron pipe  $1\frac{1}{2} \times 36$  marked -



(2)



3-27- A.C. - R.Co. for 3<sup>rd</sup> miles.

4 North - 188 vs road \*NE - 1236 vs road \*E - 1900.8 vs set iron pipe, 1 1/2 x 36 marked 4-26. A.C. - R.Co. in earth mound 2ft high and two pits, marking 4<sup>th</sup> miles.

5 North - 149 vs E & W fence, 155 vs wagon road - 1325 vs road - 1900.8 vs set iron pipe, 1 1/2 x 36 marked 5-25. A.C. - R.Co. in earth mound and 2 pits for 5<sup>th</sup> miles.

6 North - 66 vs E & W fence - 1560 vs road \*NE - 1900.8 vs set iron pipe, 1 1/2 x 36 marked 6-24. A.C. - R.Co. in earth mound 2ft high and two pits, for 6<sup>th</sup> mile on high level plains.

7 North - 324 vs E & W road in old fire guard. - 630 vs road \*SE. 850 vs, 1340 vs & 1576 vs roads running NE. - 1706 vs brink of deep canon. - 1900.8 vs large stone mound marked X on North bank of canon marking 7<sup>th</sup> mile.

8 North - through very rough, deep, canon 1160 vs to point on high steep mountain in canon at which build stone monument, in prominent place, 3 1/2 ft base and 7 1/2 ft high, at 1900.8 vs build large stone mound marked X in very rocky and rough canon for 8<sup>th</sup> miles.

9 North - 450 vs point on top of high ridges in canon. 1900.8 vs stone & earth mound marked X on north slope of steep ridges for 9<sup>th</sup> miles.

10 North - 652 vs E & W - 11 wire fence in valley of creek 975 vs cross dry creek \*NE - 1850 vs top of north bluff of creek - 1900.8 vs earth and stone mound marked X 2ft high, on edge of level divide, for 10<sup>th</sup> miles.

11 North - across level top of divide - 1900.8 vs earth and stone mound (marked X) - 2ft high at foot of high rocky bluff facing south for 11<sup>th</sup> miles.

12 North - 950 vs top of high, steep ridges. - 1750 vs deep canon 1900.8 vs large stone mound marked X on West bank of a canon for 12<sup>th</sup> miles.



(3)



13<sub>1</sub> North - 615 vs cross main stream of Palo Duro river. - 1900.8  
2 vs point on West bank of Cañon a stone 6ft high marked X for 13<sup>th</sup> mile.

3 North - 300 vs point in bottom of very deep cañon - 106.0 vs point on

14<sub>4</sub> North cap rock of Palo Duro Cañon - 1900.8 vs - ~~vs~~ set iron pipe  
5 1 1/2 x 36 marked 14-16. A Co - R Co - on West slope to cañon running  
6 South for 14<sup>th</sup> miles.

15<sub>7</sub> North - 65 vs + 207 vs ravine "Sw." at 420 vs build stone monument  
8 2 1/2 ft base and 5 1/2 ft high at a prominent point on line on  
9 top of high sandy ridge, from which a lone cedar tree is S 61 E  
10 50 1/2 vs. Another cedar tree is S 55 1/2 W 35 1/2 vs. - at 1900.8 vs set  
11 iron pipe <sup>1 1/2 x 36</sup> marked 15-15 - A Co - R Co - <sup>in earth mound 2ft high + 2 pits</sup> on East slopes of  
12 rough divide - 40 vs West of ravine "South" for 15<sup>th</sup> miles.

16<sub>13</sub> North - 1900.8 vs. set iron pipe 1 1/2 x 36 marked 16-14 - A Co - R Co  
14 in earth mound + 2 pits, on plains, 20 vs West of small  
15 dry lake, for 16<sup>th</sup> miles.

17<sub>16</sub> North - 1900.8 vs set iron pipe <sup>in earth mound + 2 pits</sup> marked 1 1/2 x 36 marked 17-13 -  
17 A Co - R Co - on high level plains for 17<sup>th</sup> miles.

18<sub>18</sub> North - 605 vs E & W road - 1900.8 vs set iron pipe 1 1/2 x 36  
19 marked 18-13 - A Co - R Co, in earth mound two feet high  
20 and 2 pits, 140 vs north of large dry lake, for 18<sup>th</sup> mile.

19<sub>21</sub> North - 1900.8 vs set pipe 1 1/2 x 36 marked 19-11 - A Co -  
22 R Co - in mound 2ft high + 2 pits, on level plains, marking  
23 19<sup>th</sup> mile.

20<sub>24</sub> North - 1900.8 vs set iron pipe 1 1/2 x 36 marked 20-10 -  
25 A Co - R Co in earth mound 2ft high + 2 pits for 20<sup>th</sup> mile.

21<sub>26</sub> North - 193 vs road "N 30 E" - 1900.8 vs set iron pipe  
27 1 1/2 x 36 marked 21-9 - A Co - R Co - in earth mound 2ft  
28 high and two pits, on North slopes to lake, for 21<sup>st</sup> miles.

22<sub>29</sub> North - 1900.8 vs set iron pipe 1 1/2 x 36 marked 22-8 -  
30 A Co - R Co - 300 vs north of large dry lake, for 22<sup>nd</sup> mile.


23<sub>31</sub> North - 819 vs E & W - 4 wire fence, 930 vs road - 1900.8 vs set  
32 iron pipe 1 1/2 x 36 marked 23-7 - A Co - R Co <sup>in earth mound 2ft high + 2 pits</sup> 400 vs South of lake  
Page of water, for 23<sup>rd</sup> mile



Carson Co.

1233 vs FW & D.C.R.R.

From Co. corner the NW corner sec. 100,  
B1K B7, H & G.N.R.R. is 818 vs E & 826 vs S.

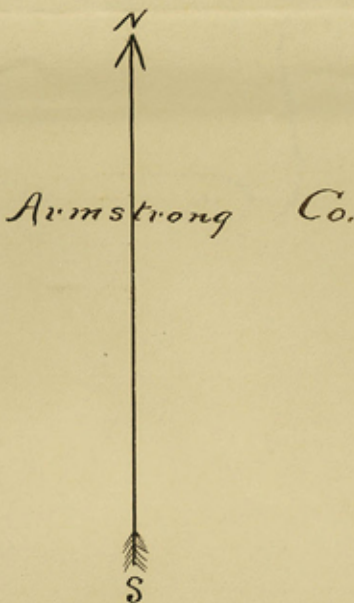

Armstrong Co.

18 mi. vs 16 1/2 vs SW  
& D.C. R.R.

Donley Co.

Randall Co.

14 mi. vs 120 vs stone mt.  
2 1/2 ft base and 5 1/2 ft high.

7 mi. vs 160 vs stone mt.  
3 1/2 ft base and 7 1/2 ft high.

Md and semi-circular trench from  
which windmill is N 60 E. Remains  
of Jesse Dobbs house S 14 1/2 W. 241 vs.  
from Co. corner the iron pipe marking  
Gibson is 1312 vs East and  
86 1/2 vs North.

Smisher Co.

Briscoe Co.

Scale - 5 miles = one inch





(4)

25 1 North - crossing lake - 1900.8 vs set iron pipe 1 1/2 x 36 marked 24-6  
2 O.C. - R.C. in earth mound 2ft high & 2 pits, on south slope to lake  
3 for 24th miles.

25 4 North - 890 vs road - 1900.8 vs set iron pipe marked 25-5 - O.C. -  
5 R.C. in earth mound 2ft high & 2 pits, on level plains for 25th miles.

26 6 North - 930 vs E & W fence - 1900.8 vs set iron pipe 1 1/2 x 36 marked 26-4 -  
7 O.C. - R.C. in earth mound 2ft high and 2 pits, on slope to north, marking  
8 26th miles.

27 9 North - 1900.8 vs set iron pipe 1 1/2 x 36 marked 27-3 - O.C. - R.C. in mound  
10 2ft high and 2 pits - for 27th miles.

28 11 North - 752 vs road - 1900.8 vs set iron pipe marked 28-2 - O.C. - R.C.  
12 in mound <sup>2ft high</sup> and 2 pits - for 28th miles.

29 13 North - 70 vs road - 1043 vs E & W fence - 1900.8 vs set iron pipe 1 1/2 x 36 marked  
14 29-1 - O.C. - R.C. - 12 vs West of N & S field fence, for 29th miles

30 15 North - 703 vs NW corner of field - 1075 vs 3 wire fence from  
16 which point the NW corner of sec 100, Blk B4, N44 NR R.C. is  
17 East 822 varas. - at 1900.8 vs the zinc cone marking the  
18 common corner of Carson, Armstrong, Randall and Potter Counties,  
19 at the place of beginning. O.C. Ground Chain Carriers  
20 Ben Merritt

21 I, J. L. Gray, Special Surveyor for Carson, Armstrong, Randall and Donley  
22 Counties do hereby certify that the foregoing described survey was actually  
23 made by me, on the ground, according to law, on the date and with the  
24 Chain Carriers aforesaid, and that the corners, lines, boundaries and marks of  
25 the same are truly and correctly described and set forth in the fore-  
26 going plat and field notes. J. L. Gray

27 Special Surveyor for Carson, Armstrong, Randall & Donley Counties

THE STATE OF TEXAS,

County of Randall } I, J. H. Garrison Clerk of the  
County Court in and for said County, do hereby certify that the foregoing Instrument  
dated the 4 day of March 1901, with its certificates of authentication, was filed for  
Record in my office, the 10<sup>th</sup> day of May 1901, at 2 o'clock P. M., and duly  
Recorded the 17<sup>th</sup> day of May 1901, at 3 o'clock P. M., in  
Civil Minutes Record of said County, in Vol. 1 on Pages 64 to 67

WITNESS my hand and the seal of the County Court of said County, at office in Canyon City  
Texas, the day and year last above written.

By J. H. Garrison Deputy Randall County Court Randall County.



Randall Co Bdry Line 5

1/ Randall Co  
E. line

FILE OR RECORD

May 10<sup>th</sup> 1891/1901

at 2 o'clock Minutes P.M.

J. H. Garrison Clerk  
County Court, Randall Co. Tex.

by \_\_\_\_\_ Deputy.

cm. 58140

Filed in Genl. Land  
Office May 20<sup>th</sup> 1901  
J. B. Wise

Order and Confirmation  
of Court required, also  
sketch 2 or 4000 or  
more showing surveys  
interacted along the line  
6/2/01 Wise